

**isc Silicon NPN Power Transistor**

**2SC3459**

**DESCRIPTION**



- High Breakdown Voltage-  
:  $V_{(BR)CBO} = 1100V(\text{Min})$
- Fast Switching Speed
- Wide Area of Safe Operation

**APPLICATIONS**

- Designed for switching regulator Applications

**ABSOLUTE MAXIMUM RATINGS( $T_a=25^\circ\text{C}$ )**

SYMBOL	PARAMETER	VALUE	UNIT
$V_{CBO}$	Collector-Base Voltage	1100	V
$V_{CEO}$	Collector-Emitter Voltage	800	V
$V_{EBO}$	Emitter-Base Voltage	7	V
$I_C$	Collector Current-Continuous	4.5	A
$I_{CM}$	Collector Current-Peak	15	A
$I_B$	Base Current-Continuous	2	A
$P_C$	Collector Power Dissipation @ $T_C=25^\circ\text{C}$	90	W
$T_J$	Junction Temperature	150	$^\circ\text{C}$
$T_{stg}$	Storage Temperature Range	-55~150	$^\circ\text{C}$

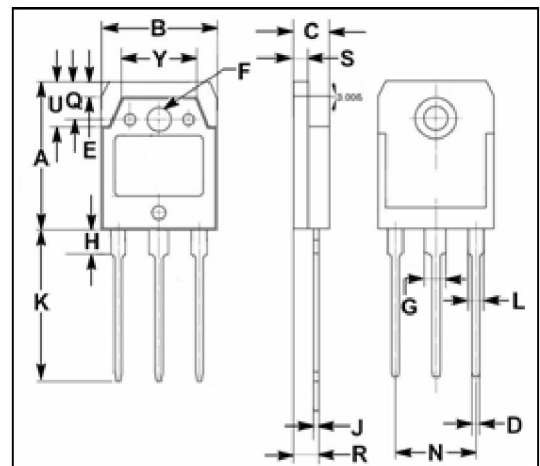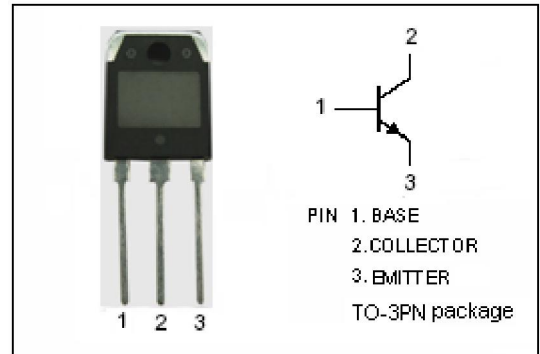

DIM	mm	
	MIN	MAX
A	19.90	20.10
B	15.38	15.42
C	4.75	4.85
D	0.90	1.10
E	1.90	2.10
F	3.40	3.60
G	2.98	3.02
H	3.20	3.40
J	0.595	0.605
K	19.95	20.25
L	1.98	2.02
N	10.89	10.91
Q	4.95	5.05
R	3.35	3.45
S	1.995	2.005
U	5.90	6.10
Y	9.90	10.10

## isc Silicon NPN Power Transistor

2SC3459

## ELECTRICAL CHARACTERISTICS

 $T_C=25^{\circ}\text{C}$  unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage	$I_C=5\text{mA}$ ; $R_{BE}=\infty$	800			V
$V_{CEO(SUS)}$	Collector-Emitter Sustaining Voltage	$I_C=2\text{A}$ ; $I_{B1}=-I_{B2}=0.4\text{A}$ ; $L=2\text{mH}$ ; clamped	800			V
$V_{(BR)CBO}$	Collector-Base Breakdown Voltage	$I_C=1\text{mA}$ ; $I_E=0$	1100			V
$V_{(BR)EBO}$	Emitter-Base Breakdown Voltage	$I_E=1\text{mA}$ ; $I_C=0$	7			V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C=2\text{A}$ ; $I_B=0.4\text{A}$			2.0	V
$V_{BE(sat)}$	Base-Emitter Saturation Voltage	$I_C=2\text{A}$ ; $I_B=0.4\text{A}$			1.5	V
$I_{CBO}$	Collector Cutoff Current	$V_{CB}=800\text{V}$ ; $I_E=0$			10	$\mu\text{A}$
$I_{EBO}$	Emitter Cutoff Current	$V_{EB}=5\text{V}$ ; $I_C=0$			10	$\mu\text{A}$
$h_{FE-1}$	DC Current Gain	$I_C=0.3\text{A}$ ; $V_{CE}=5\text{V}$	10		40	
$h_{FE-2}$	DC Current Gain	$I_C=1.5\text{A}$ ; $V_{CE}=5\text{V}$	8			
$C_{OB}$	Output Capacitance	$I_E=0$ ; $V_{CB}=10\text{V}$ ; $f_{test}=1.0\text{MHz}$		90		pF
$f_T$	Current-Gain—Bandwidth Product	$I_C=0.3\text{A}$ ; $V_{CE}=10\text{V}$		15		MHz

## Switching times

$t_{on}$	Turn-on Time	$I_C=3\text{A}$ , $I_{B1}=0.6\text{A}$ ; $I_{B2}=-1.2\text{A}$ $R_L=133\Omega$ ; $V_{CC}=400\text{V}$			0.5	$\mu\text{s}$
$t_{stg}$	Storage Time				3.0	$\mu\text{s}$
$t_f$	Fall Time				0.3	$\mu\text{s}$

◆  $h_{FE-1}$  Classifications

K	L	M
10-20	15-30	20-40